



OPAL 200X

Opacity & Dust Monitoring System for Ex Zone Application



- Opacity %
- Optical Density
- Dust (mg/m³)



- **USEPA PS-1 certified**
- **Double pass technology**
- **Dual outputs and alarms**
- **Keypad control, calibration & testing**
- **Complete range of accessories**
- **IECExp Zone 2 IIC T6 certification**



“ Australian environmental technology ”

CONTROL UNIT

Enclosure
Weight
Ambient Temperature
Power Supply
Display
Operator Indicating LED's
Outputs -analogue

IP65 weatherproof for safe zone location
1.8 Kg
-20 to +50 Deg C
110 or 240vac, 50/60Hz, 125va (+/- 10%) supplied via purge control panel.
Alphanumeric, two line display selectable – Opacity, Optical Density, mg/m3, Lens Dirt %.
Power, Alarm active, Setup mode
Dual 4-20mA output channels with selectable outputs for:
i) Opacity %, scaleable span 10 – 100% opacity
ii) Optical Density, scaleable span 0.05 – 2.0
iii) Quantitative (mg/m3), scaleable span 10 – 500 mg/m3
4 hour internal data storage for isokinetic test calibration response. Autocorrelation for mg/m3
Two (2) programmable SP-NC, 0.5A at 24vdc (50vac / 30vdc maximum)
Fault: Optical system FAIL, Blower FAIL, Lens dirt HIGH, Emission level HIGH, Cal FAIL
Procedure: Service mode, Autocal in progress
Automatic: programmable 1 to 24 hour, or local initiate from control unit, transceiver or via remote signal.
Manual: SPAN and ZERO test – live display, frozen output
10 core screened cable, max 300 metres. Must be compliant for local Ex zone application.

Data logging
Outputs - Relay
Alarms

Calibration self tests

Control – transceiver cable

PURGE PANEL

Enclosure
Dimensions
Power Supply
Input
Output
Air Supply

IP65 weatherproof for safe zone location.
300W x 450H x 150D with wall mount brackets.
110 or 240vac, 50/60Hz, 125va (+/- 10%)
Return purge air supply from transceiver – monitors DP and flow rate display.
Power supply (controlled) to OPAL Control Unit.
Instrument air supply required, maximum 5.0 psig at 5 litres per minute maximum flow rate.


OPTICAL SYSTEM

Enclosure
Power supply
Installation
Path Length
Optical System
Alignment
Lens Protection
Ambient Temperature
Process Temperature
Temperature Stability
Spectral Response
Angle of View and Projection
Response Time
System Accuracy
Zero & Span Test
Options


IECEx Zone IIC T6 certification. With lift-off weather covers supplied as standard.
6 vdc regulated, 300mA, provided by control unit.
Via 90NB standard flange: 205mm diameter, 4 x 18 mm holes on 165mm pcd.
0.5 to 15 metre, flange to flange
Temperature stabilised double pass system with high power LED light source, modulated for ambient immunity.
TTL (thru-the-lens) view – 4 adjustment bolts on transceiver flange spool, +/- 4 degrees.
Air blower inlets on flanged air purge spools. Optional adaptors for plant instrument air.
-20 to +50 Deg C
Maximum 450° C standard. Consult factory for higher levels.
Less than 0.5% opacity drift between from 0 - 50° C (USEPA PS-1conformant)
515 to 585 nm, less than 2% of peak response outside 400 to 700 nm. (USEPA PS-1 conformant)
<4.0° from optical axis. (USEPA PS-1 conformant)
< 3 seconds, to 100% of actual value.
Better than or equal to +/- 2.0% opacity (USEPA PS-1 conformant)
Manual test operation via control unit, transceiver keypad or remote input.
Pre-filtered air blower assembly, with weatherproof cover set. NOTE: EX blower may be required.
Air purge adaptors for instrument air connection.
Field audit module kit with set of 3 secondary certified ND filters as per USEPA requirements.
2 line, 32 character, alphanumeric LCD display, backlit
4 push button operation - Select DISPLAY, TEST, INSTALL, and FACTORY modes.

Transceiver Display
Transceiver Control


CONTROL UNIT (3.2Kg)



260




95




90NB ANSI flange with 4 x 18mm holes on 165 pcd

TRANSCEIVER (8.4Kg) / RETROREFLECTOR (2.3Kg)

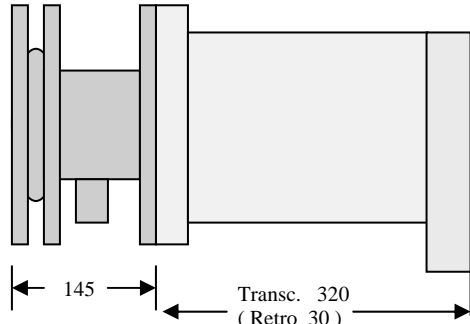

145

Transc. 320
(Retro 30)



210



OPAL Environmental Pty Ltd

Unit 30 / 24 Anzac Avenue Smeaton Grange NSW 2567
Post Office Box 57 Cobbitty NSW 2570 Australia
Tel: (61) 2 4648 4500 Fax: (61) 2 4648 4055

www.opalenvironmental.com.au

LOCAL SALES & SERVICE

Technical and performance specifications for OPAL opacity and dust monitoring systems are correct at time of print. We reserve the right to review, and change where necessary, product technical specifications without obligation to advise current users and maintainers. Wherever possible, all new project tenders will be advised of change.